



# WHEATHEART




GHR Series Augers

# Introducing Wheatheart's New GHR Series Auger

- Galvanized main tube
- Painted "A" frame, steel undercarriage
- Electric motor or PTO drive option
- 8" diameter in 31', 36', 41', 46', 51', 56', 61', 71' lengths
- 10" diameter in 31', 41', 51', 61', 71' lengths

## Height, Reach & Wheel Tread

	A	B	C	D	E	F	G	H	I	WHEEL TREAD
	Height Lowered	Height Halfway	Height Raised	Reach Lowered	Reach Halfway	Reach Raised	Height at Liftarms	Height at Wheels	Intake Reach	
31'	7'8"	15'1"	21'6"	13'9"	12'0"	9'3"	8'10"	12'10"	7'8"	70"
36'	9'0"	17'4"	24'10"	16'3"	14'3"	11'2"	10'0"	14'4"	8'11"	82"
41'	9'7"	20'2"	28'7"	18'8"	16'4"	12'8"	11'6"	16'4"	10'2"	88"
46'	10'10"	22'7"	31'6"	20'11"	18'3"	14'3"	12'9"	18'1"	11'6"	88"
51'	11'11"	25'0"	35'0"	23'1"	20'2"	15'10"	14'2"	19'11"	12'10"	94"
56'	11'5"	26'0"	38'0"	25'0"	21'6"	16'2"	16'10"	23'2"	13'1"	112"
61'	11'8"	28'4"	41'0"	27'4"	24'4"	19'0"	17'2"	24'3"	16'2"	112"
71'	12'10"	33'0"	47'0"	31'8"	28'1"	22'6"	19'8"	27'6"	18'5"	118"

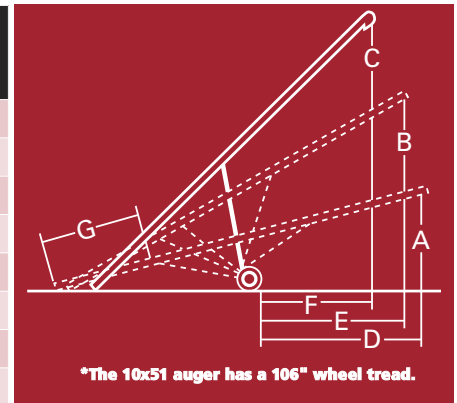

## Available With These Drive Options

	EMD		PTO-SD	
	8"	10"	8"	10"
31'	•	•	•	•
36'	•		•	
41'	•	•	•	•
46'	•		•	
51'	•	•	•	•
56'	•		•	
61'	•	•	•	•
71'	•	•	•	•

## Horsepower Requirements

	8"		10"	
	PTO H.P.	ELEC. H.P.	PTO H.P.	ELEC. H.P.
31'	-	5	30	7.5-10
36'	-	5-7.5	-	-
41'	-	5-7.5	40	10-15
46'	-	7.5	-	-
51'	-	7.5	45	15-20
56'	30	10	-	-
61'	35	10	55	20
71'	45	15	60	20-25

Under reasonable conditions high moisture grain will require more horsepower

## GHR Hopper

**NEW** optional intake hopper makes it easier to unload bins and fill trucks without the hassle of a poly hopper.



**We know you work long and hard, especially during harvest. FIRST! Please take the time to put safety first:**

Wheatheart augers are designed with operator safety in mind and incorporate many safety features. Everyone operating an auger must read and understand the operator's manual and safety decals before attempting to operate the unit. Do not modify this implement in any way. Use only for intended purposes. Keep all safety shields in place while operating. Never operate with any safety shields or guard removed or modified. Never transport the unit in a raised position. Check overhead before raising. Never attempt to service the auger while it is running. Keep children, pets and untrained personnel away from work area.

## Safety First!

